


Helion Technology

FULL DATASHEET - Fast MD5 Hash Core for Xilinx FPGA

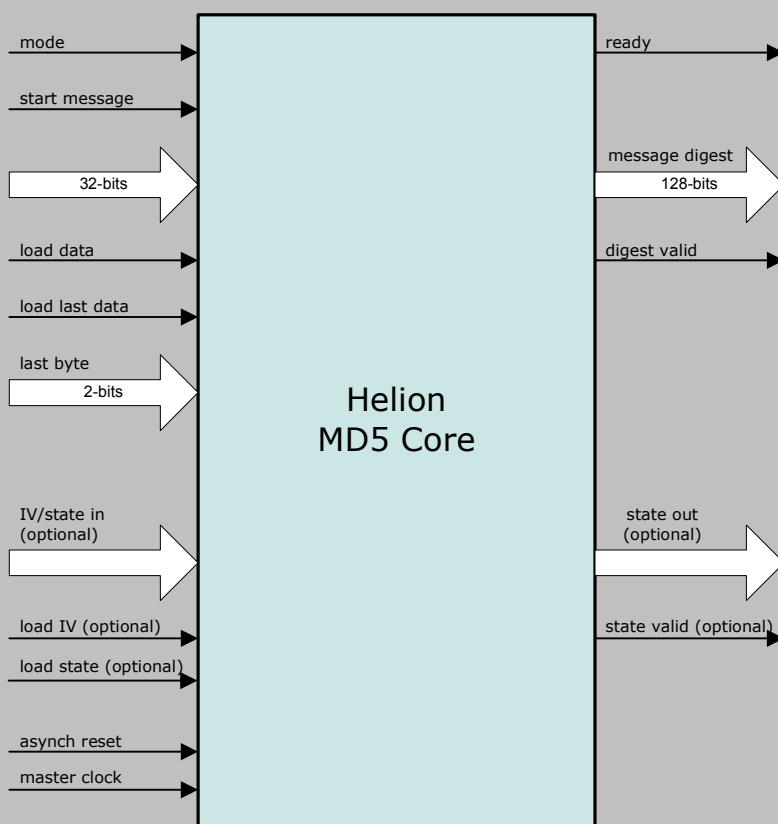

Features

- Implements the MD5 secure hash algorithm to RFC 1321
- Fast operation – each 512-bit block requires only 66 master clock cycles
- Performs automatic message length calculation and padding insertion
- Optional user initialisation of IVs for optimised HMAC support
- HMAC wrapper available to make implementations quick and easy
- Optional state unload/reload feature for handling fragmented messages
- Simple external interface
- Highly optimised for use in Xilinx FPGA technologies

Deliverables

- Target specific netlist or fully synthesisable RTL VHDL/Verilog
- VHDL/Verilog simulation model and testbench with vectors
- Comprehensive user documentation

Overview

The Helion Fast MD5 core implements the MD5 hash algorithm as described in RFC 1321. It is a high performance core which has been designed especially for use in Xilinx FPGA. The MD5 algorithm takes as input a message of arbitrary length, processes the message as a series of 512-bit blocks, and produces as output a compressed representation of the message data in the form of a 128-bit message digest.

MD5 has been employed in a wide variety of security applications including generating and checking file checksums, as well as implementations of the standard keyed-Hash Message Authentication Code (HMAC) described in FIPS PUB 198. This HMAC is commonly used within the IPsec and TLS/SSL security protocols, as well as Digital Signature applications, where its use ensures data integrity and data origin authentication.

Helion Technology Limited

Ash House, Breckenwood Road,
Fulbourn, Cambridge CB21 5DQ, England



Functional Description

The Helion Fast MD5 hash core implements one of the most common secure hash algorithms which is used where data integrity and/or origin authentication is a requirement. It processes an arbitrary length message by operating on successive 512-bit blocks of data, producing as output a 128-bit message digest.

The core contains an internal 512-bit block store which may be loaded with message data under the control of external logic or a microprocessor while the core indicates it is ready. Once the block store is full the core indicates it is busy and executes the hash algorithm; on completion the core indicates it is ready to accept a further message block. The external logic is responsible for informing the core when the last message word is available at the data inputs and the location of the last message byte within the last word. This allows the core to calculate the exact message length and append message padding accordingly. When the last message block has been processed the core outputs the resulting message digest and indicates its validity.

Optionally, whilst loading the first message word, the external logic may also load customised initial values into the core. This allows pre-computed initial values to be used for efficient implementation of a Hash-based Message Authentication Code (HMAC); loading of these incurs no throughput penalty since they have their own dedicated input port. In addition, the internal hash state can be made accessible, so that it may be stored externally and subsequently reloaded; this may be a useful option where fragmented messages are being hashed.

Logic Utilisation and Performance

Unlike most FPGA core vendors, Helion is both a certified Xilinx AllianceCORE IP provider and Xilinx Alliance Program consultancy. We therefore take great care when implementing our Xilinx cores, and as a result our cores have been designed from the bottom up to be highly optimal in each Xilinx FPGA technology - they are not simply based on a synthesised generic ASIC design.

The Helion Fast Dual MD5 Hash core makes use of Xilinx-specific architectural features in order to achieve high performance combined with efficient logic resource utilisation. It is available for all current Xilinx FPGA technologies.

The table below shows typical logic area and performance figures for the most popular version of the core which does not include the state unload/reload capability. Please contact Helion for full details if the configuration, device type or speed grade you require is not shown below.

	MD5 (no reload)			
technology	Spartan3 -5	Spartan3E -5	Virtex4 -11	Virtex5 -3
logic resource	623 slices 1 RAMB16	697 slices 1 RAMB16	641 slices 1 RAMB16	279 slices
max clock	74 MHz	78 MHz	122 MHz	174 MHz
max throughput (MD5)	574 Mbps	605 Mbps	946 Mbps	1349 Mbps

More Information

For more detailed information on this or any of our other products and services, please contact Helion and we will be pleased to discuss how we can assist with your individual requirements.



Helion Technology Limited

Ash House, Breckenwood Road,
Fulbourn, Cambridge CB21 5DQ, England

tel: +44 (0)1223 500 924 email: info@heliontech.com
fax: +44 (0)1223 500 923 web: www.heliontech.com